

D-300L-FR

3U High Performance Rackmount Chassis





INTRODUCTION

Introduce iStarUSA 3U industrial rackmount chassis D Storm D-300L-FR. The full size back plane and width supports dual Intel and AMD CPU motherboard. It has excellent thermal solution with extra cooling fans. Optional 3.5 and 5.25 tray enable hot-swappable storage, raid configuration, and total storage capacity up to 6 storage drives provide your server or cluster maximum flexibility and performance.


FEATURES

- Ⓐ Patented Aluminum Front Panel with Locks, Taiwan: 200281 / 190240 , China: 2L01259648.5
- Ⓑ Front Mount Power Supply
- Ⓒ Front Access USB2.0 x 2
- Ⓓ 60mm x 2, 80mm x 4 Cooling Fan
- Ⓔ Removable Air Filter
- Ⓕ Power and HDD LED
- Ⓖ Power and Alarm Reset Switch
- Ⓗ Standard I/O Shield
- Ⓘ Optional Hot-Swappable 5.25" Tray

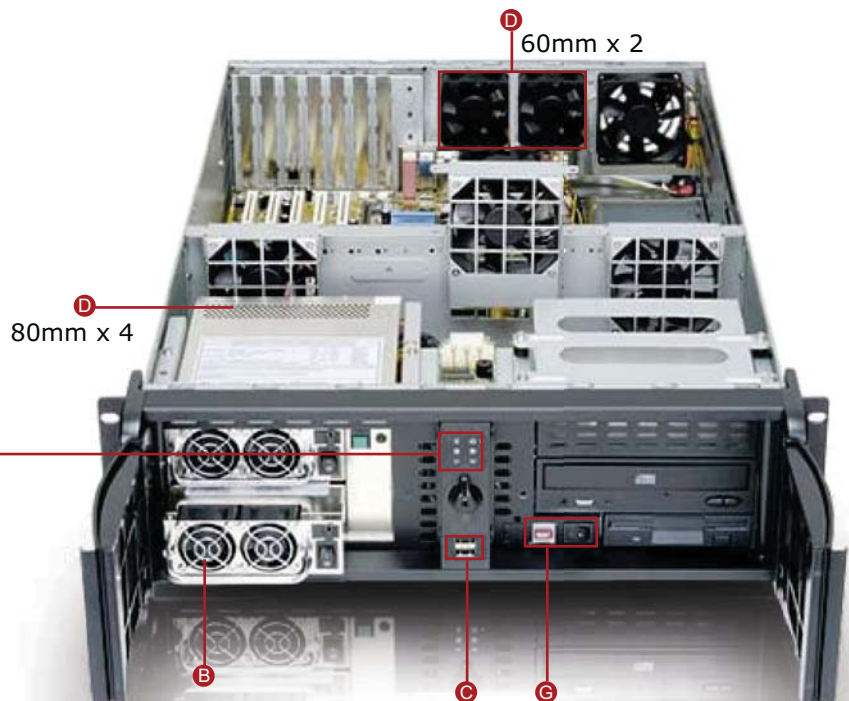

D-300L-FR

DRAWING

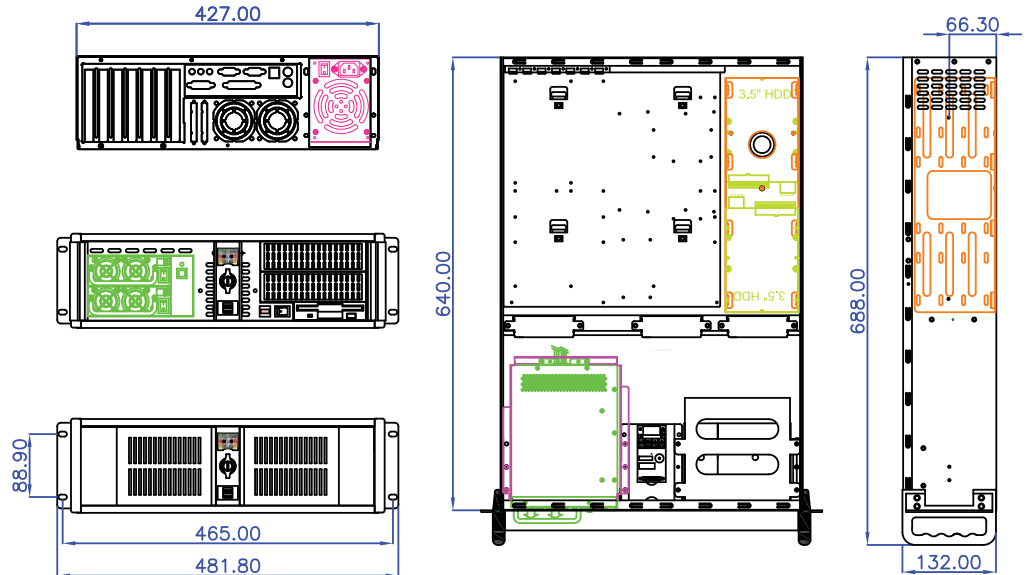

SPECIFICATIONS

Model Number	D-300L-FR
RoHS Compliance Version	Yes
Standard Drive Bays	5.25" Drive: 2 3.5" Drive: 1 3.5 Drive [internal]: 10
Cooling Fan [Option]	1 x 60mm, 4 x 80mm [1 x 60]
Mainboard Size [inch]	12 x 13
Indicators	LEDs for Power ON/OFF, HDD, Fan & Alarm
Switches	Power ON/OFF, System & Alarm Reset

Security	Front Bezel
Speaker	0.4W Built-In
Air Filter	Removable & Washable
Material of Front Bezel	Aluminum Alloy
Material of Handle	1.2mm SECC Zinc-Coated Steel
Material of Main Chassis	1.2mm SECC Zinc-Coated Steel [Japan Made]
Color of Front Bezel	Black / Blue / Silver / Red / Gold
Color of Main Chassis	Black
Front Connector	Front USB 2.0 x 2 Connector
Dimensions (WxHxD)	19 x 5.25 x 27.1 inch

OPTIONAL ACCESSORIES

Model Number	Page
RP-COMBO-SLIM	N/A
T-7	158
TC-Rail-24/26	160
BPU-230SATA	154

Model Number	Page
DD-300-DR/DS/DBlue/DG	N/A
RP-HDD3.5	N/A
DD-Fan60/80	162-163
TC-iStorm 7/8	160

POWER SUPPLY OPTIONS

Model Number	Output	Product Description	Page
TC-500R8A	500W	500W PS/2 Size Dual AC Mini Redundant Power Supply	210

:: Specification and wiring diagram subject to change without notice
 :: Limited Warranty
 :: Last Update: Jan/2011

