

D-300L-FS

3U High Performance Rackmount Chassis




INTRODUCTION

The D-300L-FS incorporate performance and capacity in a 3U form factor. It features two 5.25 and six 3.5 bays for high density storage application. Whether it's web server or database server, D-300L-FS can accommodate the thermal requirements of dual processor and Raid drive storage needs. The 7 PCI slots support PCI, PCI 64bits, AGP, and PCI-Express add-on cards which enable future upgrades for customized functions and application needs. D-300L-FS is a cost effective chassis for data and storage server.


FEATURES

- A Front Access USB2.0 x 2
- B 80mm x 4 Cooling Fan
- C Removable Air Filter
- D Power and HDD LED
- E Power and Alarm Reset Switch
- F 3 Way Aluminum Front Panel with Locks
- G Front Mount ATX Power Supply

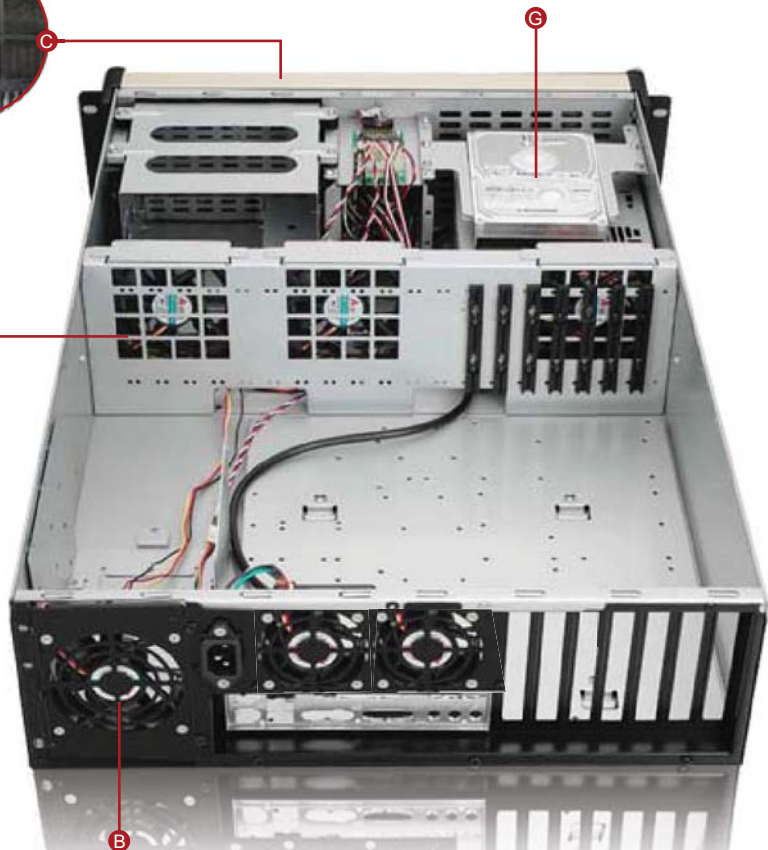

D-300L-FS

DRAWING

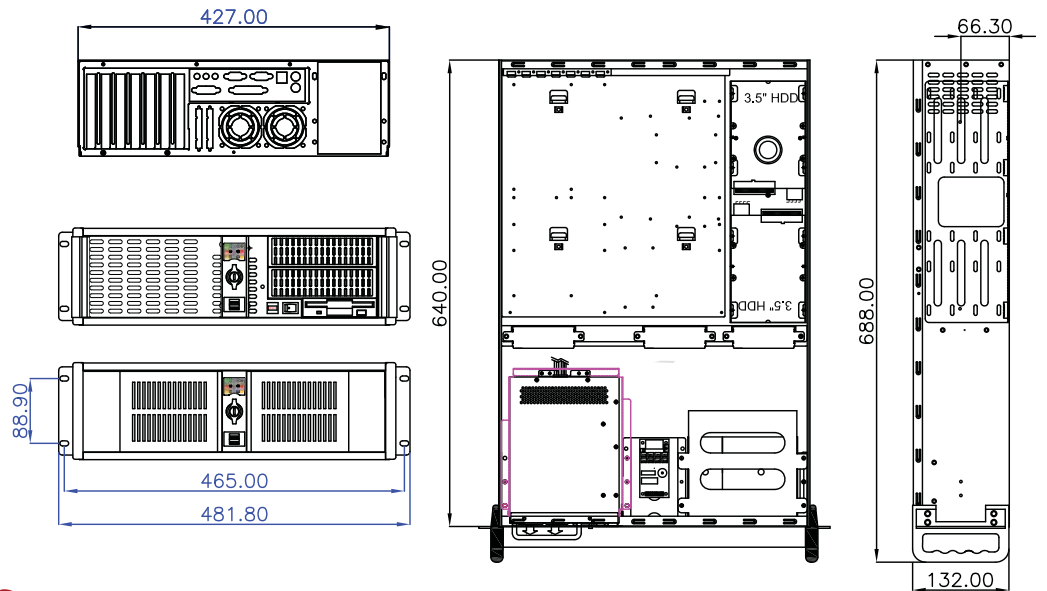

SPECIFICATIONS

Model Number	D-300L-FS	Speaker	0.4W Built-In
RoHS Compliance Version	Yes	Air Filter	Removable & Washable
Standard Drive Bays	5.25" Drive: 2 3.5" Drive: 1 3.5" Drive [internal]: 5	Expansion Slots	Standard: 7 x PCI 32bit
Cooling Fan	4 x 80mm	Material of Front Bezel	Aluminum Alloy
Mainboard Size [inch]	12 x 13	Material of Handle	SECC Zinc-Coated Steel
Indicators	LEDs for Power ON/OFF, HDD, Fan & Alarm	Material of Main Chassis	1.2mm SECC Zinc-Coated Steel [Japan Made]
Switches	Power ON/OFF, System & Alarm Reset	Color of Front Bezel	Black/Red/Blue/Silver/Gold
Security	Front Bezel	Color of Main Chassis	Black
		Front Connector	Front USB 2.0 x 2 Connector
		Dimensions (WxHxD)	19 x 5.25 x 27.1 inch

OPTIONAL ACCESSORIES

Model Number	Page	Model Number	Page
RP-COMBO-SLIM	N/A	DD-300-DR/DS/DBlue/DG	N/A
T-7	158	DD-Fan60/80	162-163
TC-Rail-24/26	160	TC-iStorm7/8	160

POWER SUPPLY OPTIONS

Model Number	Output	Page
TC-350/400/500PD1	350/400/500W	230
TC-600PD2	600W	234
TC-650PD2	650W	234
TC-700PD2	700W	234
TC-750PD2	750W	234

:: Specification and wiring diagram subject to change without notice

:: Limited Warranty

:: Last Update: Jan/2011

