

# D-400-PTS8

4U Rackmount Chassis with 8" Touch Screen LCD




## INTRODUCTION

Introducing the new D-400-PTS8 from our well-praised D-Storm rackmount chassis. Custom built-in 8" touch screen LCD enables instant system control and configuration. Three 5.25" and two 3.5" drive bay space, and ultra-quiet power supply option most suitable for DVR, telecom, and audio recording applications. Ask for our OEM/ODM project special!

## FEATURES


- Ⓐ Built-in 8" Touch Screen LCD
- Ⓑ Front Access USB2.0 x 2
- Ⓒ 80mm x 2 Cooling Fan
- Ⓓ Removable Air Filter
- Ⓔ Power and HDD LED
- Ⓕ Power and Alarm Reset Switch
- Ⓖ Optional Aluminum Front Door
- Ⓗ Optional Quiet Power Supply

Ⓓ  
2x80mm

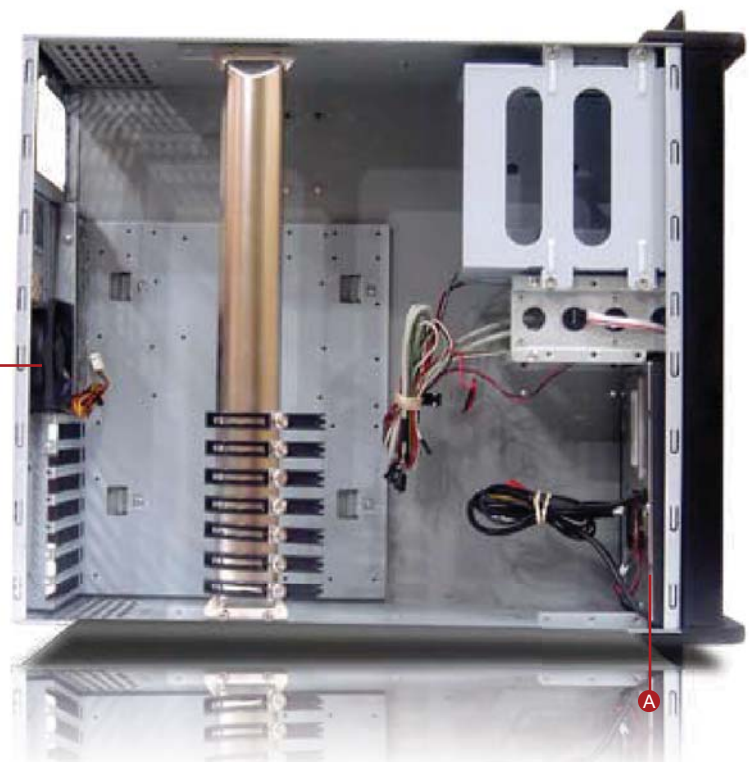

# D-400-PTS8

## DRAWING

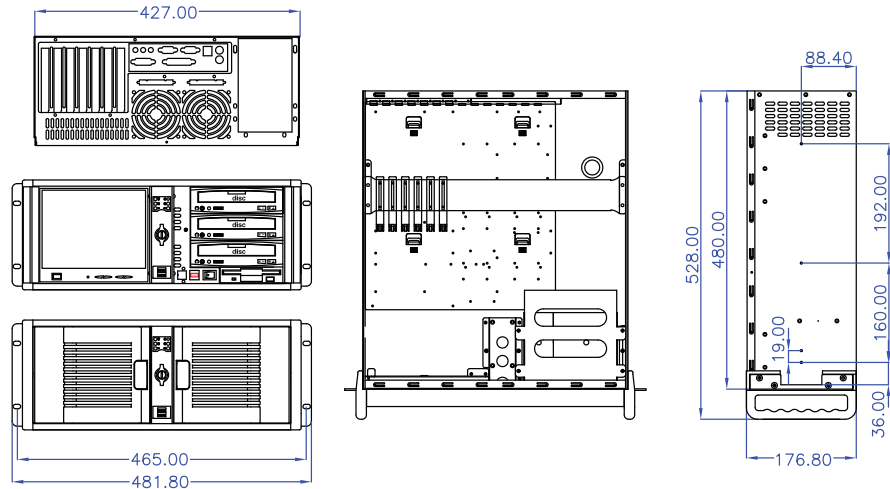

## SPECIFICATIONS

|                                |  |                                 |   |
|--------------------------------|--|---------------------------------|---|
| <b>Model Number</b>            | <b>D-400-PTS8</b>  | <b>Expansion Slots</b>          | Standard: 3xPCI 32bit<br>Optional: 1 x AGP, 2 x PCI |
| <b>RoHS Compliance Version</b> | Yes  | <b>Material of Front Bezel</b>  | Aluminum Alloy                                      |
| <b>Standard Drive Bays</b>     | 5.25" Drive: 3<br>3.5" Drive: 1<br>3.5 Drive [internal]: 1 | <b>Material of Handle</b>       | 1.2mm SECC Zinc-Coated Steel                        |
| <b>Cooling Fan [Option]</b>    | 1 x80mm [1 x 80mm]   | <b>Material of Main Chassis</b> | 1.2mm SECC Zinc-Coated Steel                        |
| <b>Mainboard Size [inch]</b>   | 12 x 10  | <b>Display Element</b>          | 8" [163 x 123mm]<br>Color TFT/LCD Hi Resolution     |
| <b>Indicators</b>              | LEDs for Power ON/OFF, HDD, Fan & Alarm                    | <b>Resolution Capabilities</b>  | 800 x 600 (480,000 dots)                            |
| <b>Switches</b>                | Power ON/OFF, System & Alarm Reset                         | <b>Video Input</b>              | 1Vp-p 75 Ohms                                       |
| <b>Air Filter</b>              | Removable & Washable                                       | <b>Audio Input</b>              | 2Vp-p 2 Ohms  |
| <b>Security</b>                | Front Bezel  | <b>Color of Front Bezel</b>     | Black   |
| <b>Speaker</b>                 | 0.4W Built-In  | <b>Color of Main Chassis</b>    | Black   |
|                                |  | <b>Front Connector</b>          | Front USB 2.0 x 2 Connector                         |
|                                |  | <b>Dimensions (WxHxD)</b>       | 19 x 7 x 20.8 inch                                  |

## OPTIONAL ACCESSORIES

| Model Number        | Page    | Model Number          | Page |
|---------------------|---------|-----------------------|------|
| RP-COMBO-SLIM       | N/A     | DD-400-DR/DS/DBlue/DG | N/A  |
| T-7-SA              | 158     | RP-HDD3.5             | N/A  |
| TC-Rail-20/24/26    | 160     | DD-Fan 80             | 163  |
| BPU-230SATA/340SATA | 154/155 | TC-iStorm 7/8         | 160  |

## POWER SUPPLY OPTIONS

| Model Number      | Output       | Page | Model Number          | Output           | Page |
|-------------------|--------------|------|-----------------------|------------------|------|
| TC-300/400R8      | 300/400W     | 208  | TC-600/650/700/750PD2 | 600/650/700/750W | 234  |
| TC-300/400/500R8A | 300/400/500W | 210  |                       |                  |      |
| TC-350/400/500PD1 | 350/400/500W | 230  |                       |                  |      |
| TC-600/700R3N     | 600/700W     | 212  |                       |                  |      |
| TC-580/620PD3     | 580/620W     | 232  |                       |                  |      |

:: Specification and wiring diagram subject to change without notice  
 :: Limited Warranty  
 :: Last Update: Jan/2011

