

D-400

4U Compact Stylish Rackmount Chassis





INTRODUCTION

iStarUSA 4U industrial rackmount chassis D Storm D-400. Combine with BPU or T Series enable hot-swappable storage capability. It also supports up to seven add-on cards and total storage capacity up to 5 storage drives for 1/0/5 raid configuration. D-400 provides your server or cluster maximum reliability and performance. Optional Aluminum Body reduces total chassis weight and also provides enhanced thermal cooling solution.


FEATURES

- Ⓐ Patented Aluminum Front Panel with Locks, Taiwan: 200281 / 190240 , China: 2L01259648.5
- Ⓑ Optional BPU-230 2 to 3 Hot-Swappable HDD Cage
- Ⓒ Front Access USB2.0 x 2
- Ⓓ 120mm x 1, 80mm x 2 Cooling Fan
- Ⓔ Removable Air Filter
- Ⓕ Power and HDD LED
- Ⓖ Power and Alarm Reset Switch
- Ⓗ Standard I/O Shield
- Ⓘ Optional Aluminum Chassis

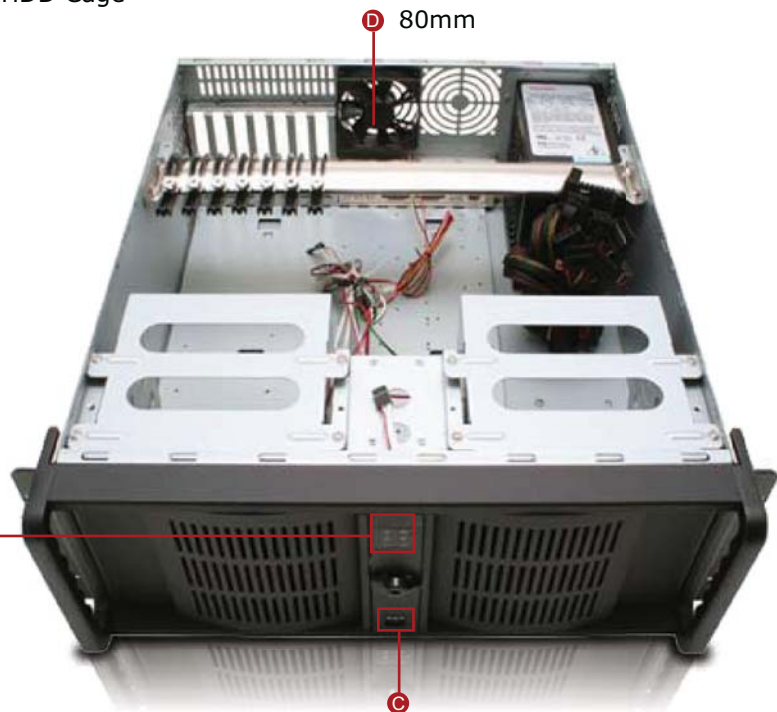

D-400

DRAWING

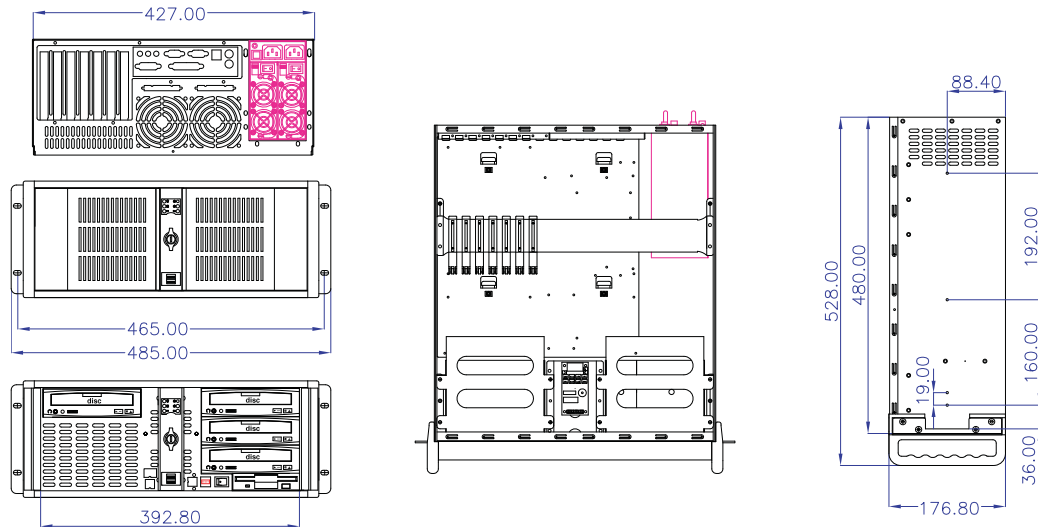

SPECIFICATIONS

| | | | |
|--------------------------------|--|---------------------------------|---|
| Model Number | D-400 | Security | Front Bezel |
| RoHS Compliance Version | Yes | Speaker | 0.4W Built-In |
| Standard Drive Bays | 5.25" Drive: 4 3.5" Drive: 1 3.5 Drive [internal]: 2 | Air Filter | Removable & Washable |
| Cooling Fan [Option] | 1 x 120mm, 1 x 80mm [1 x 80mm] | Material of Front Bezel | Aluminum Alloy |
| Mainboard Size [inch] | 12 x 10 | Material of Handle | 1.2mm SECC Zinc-Coated Steel |
| Indicators | LEDs for Power ON/OFF, HDD, Fan & Alarm | Material of Main Chassis | 1.2mm SECC Zinc-Coated Steel [Japan Made] |
| Switches | Power ON/OFF, System & Alarm Reset | Color of Front Bezel | Black / Blue / Silver / Red / Gold |
| | | Color of Main Chassis | Black |
| | | Front Connector | Front USB 2.0 x 2 Connector |
| | | Dimensions (WxHxD) | 19 x 7 x 20.8 inch |

OPTIONAL ACCESSORIES

| Model Number | Page | Model Number | Page |
|---------------------|---------|-----------------------|------|
| RP-COMBO-SLIM | N/A | DD-400-DR/DS/DBlue/DG | N/A |
| T-7 | 158 | RP-HDD3.5 | N/A |
| TC-Rail-24/26 | 160 | DD-Fan 80 | 163 |
| BPU-230SATA/340SATA | 154/155 | TC-iStorm 7/8 | 160 |

POWER SUPPLY OPTIONS

| Model Number | Output | Page | Model Number | Output | Page |
|-------------------|--------------|------|--------------------|------------------|------|
| TC-300/400R8 | 300/400W | 208 | 600/650/700/750PD2 | 600/650/700/750W | 234 |
| TC-300/400/500R8A | 300/400/500W | 210 | | | |
| TC-350/400/500PD1 | 350/400/500W | 230 | | | |
| TC-600/700R3N | 600/700W | 212 | | | |
| TC-580/620PD3 | 580/620W | 232 | | | |

:: Specification and wiring diagram subject to change without notice
 :: Limited Warranty
 :: Last Update: Jan/2011

