

D2-300

3U Compact Stylish Rackmount Chassis





INTRODUCTION

The 3U industrial rackmount chassis D2 Storm D2-300. Optional BPU Series enables hot-swappable storage, 1/0/0+1/JBOD Raid configuration, and up to total of 6 HDD storage capacities. D2-300 backplane supports 7 full-length add-on cards. Optional Aluminum Body reduces total chassis weight and also provides enhanced thermal cooling solution provide your system with maximum flexibility and performance.


FEATURES

- Ⓐ Front Access USB2.0 x 2
- Ⓑ 60mm x 1 Cooling Fan
- Ⓒ Removable Air Filter
- Ⓓ Power and HDD LED
- Ⓔ Power and Alarm Reset Switch
- Ⓕ I/O Shield
- Ⓖ Optional Aluminum Chassis

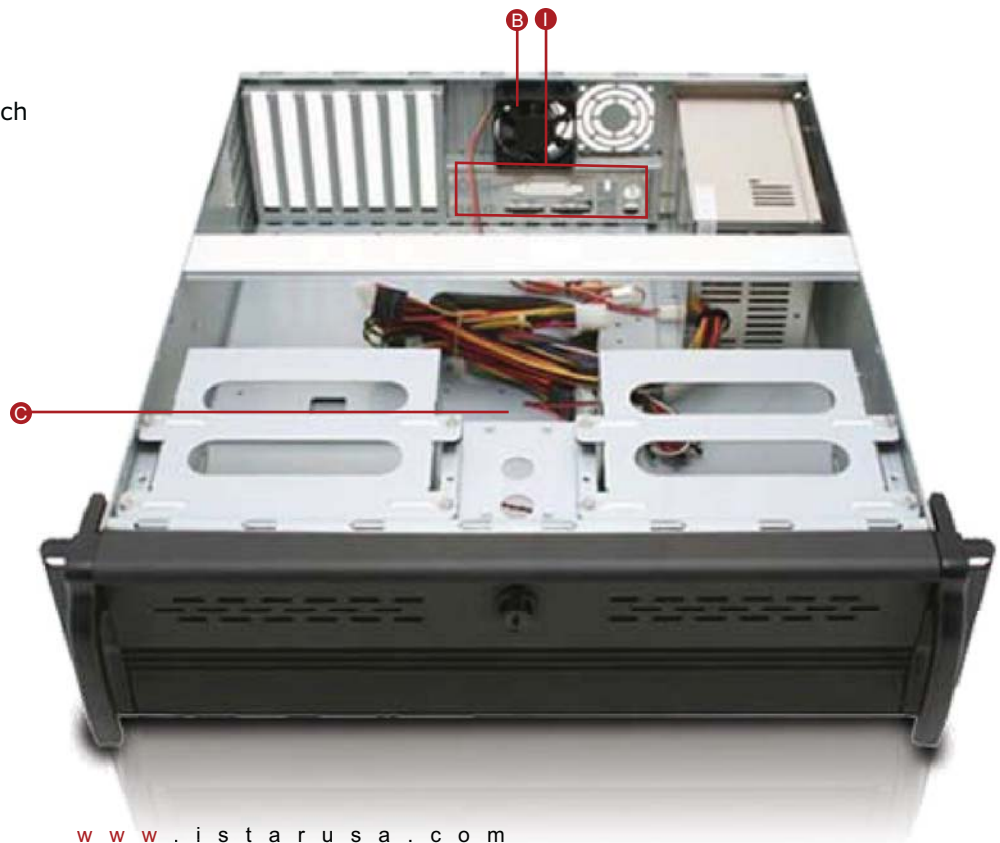

D2-300

DRAWING

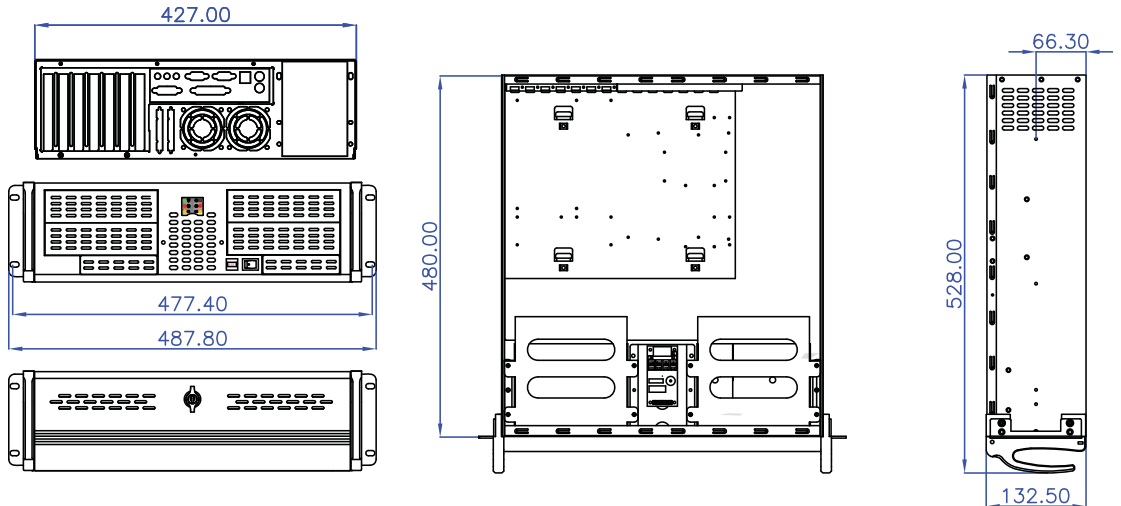

SPECIFICATIONS

Model Number	D2-300
RoHS Compliance Version	Yes
Standard Drive Bays	5.25" Drive: 4 3.5" Drive: 2
Cooling Fan [Option]	1 x 60mm [1 x 60mm]
Mainboard Size [inch]	12 x 10
Indicators	LEDs for Power ON/OFF, HDD, Fan & Alarm
Switches	Power ON/OFF, System & Alarm Reset
Speaker	0.4W Built-In

Air Filter	Removable & Washable
Security	Front Bezel
Material of Front Bezel	Aluminum Alloy
Material of Handle	1.2mm SECC Zinc-Coated Steel
Material of Main Chassis	1.2mm SECC Zinc-Coated Steel [Japan Made]
Color of Front Bezel	Black/Red/Blue/Silver/Gold
Color of Main Chassis	Black
Front Connector	Front USB 2.0 x 2 Connector
Dimensions (WxHxD)	19 x 5.25 x 20.8 inch

OPTIONAL ACCESSORIES

Model Number	Page
RP-COMBO-SLIM	N/A
T-7	158
TC-Rail-20/24/26	160
RP-HDD3.5	N/A

Model Number	Page
DD-300-DR/DS/DBLue/DG	N/A
DD-Fan60/80	162-163
TC-iStorm7/8	160
BPU-230SATA	154

POWER SUPPLY OPTIONS

Model Number	Output	Page
TC-3U/30	300W	224
TC-3U/40	400W	224
TC-3U/46	460W	224
TC-350/400/460R2U	350/400/460W	214

:: Specification and wiring diagram subject to change without notice

:: Limited Warranty

:: Last Update: Jan/2011

