

D2-300L-M6SA

3U 6 Hot-Swappable Rackmount Chassis




INTRODUCTION

A descendant of our popular D-Storm rackmount chassis D2-300L-M6SA is stylish and compact. The redesigned D2-300L-M6SA feature 6 hot-swap drive trays with SATA II interface to provide high density and high availability storage system. D2-300L-M6SA supports up to 7 add-on cards for system expansions and upgrades. Excellent thermal design with 5 x 80mm cooling fan ensures optimal performance. D2-300L-M6SA is the cost-effective solution for 3U storage server chassis.


FEATURES

- A 6 Hot-Swappable SATA II Drive Bay
- B Front Access USB2.0 x 2
- C 80mm x 5 Cooling Fan
- D Removable Air Filter
- E Power and HDD LED
- F Power and Alarm Reset Switch
- G I/O Shield

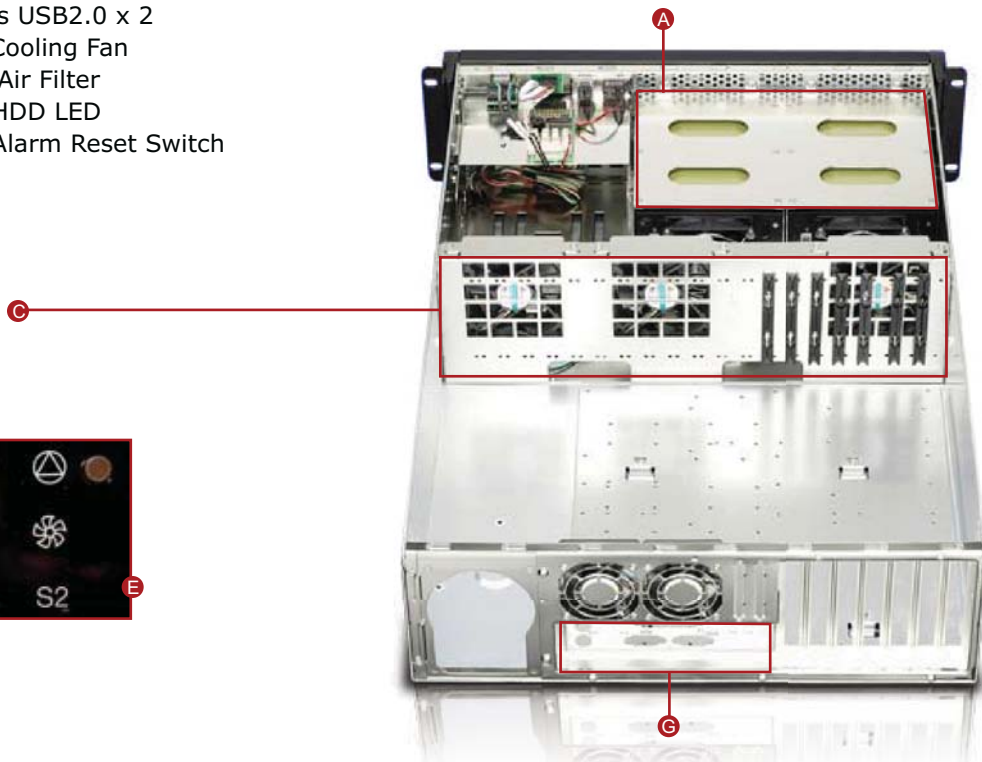

D2-300L-M6SA

DRAWING

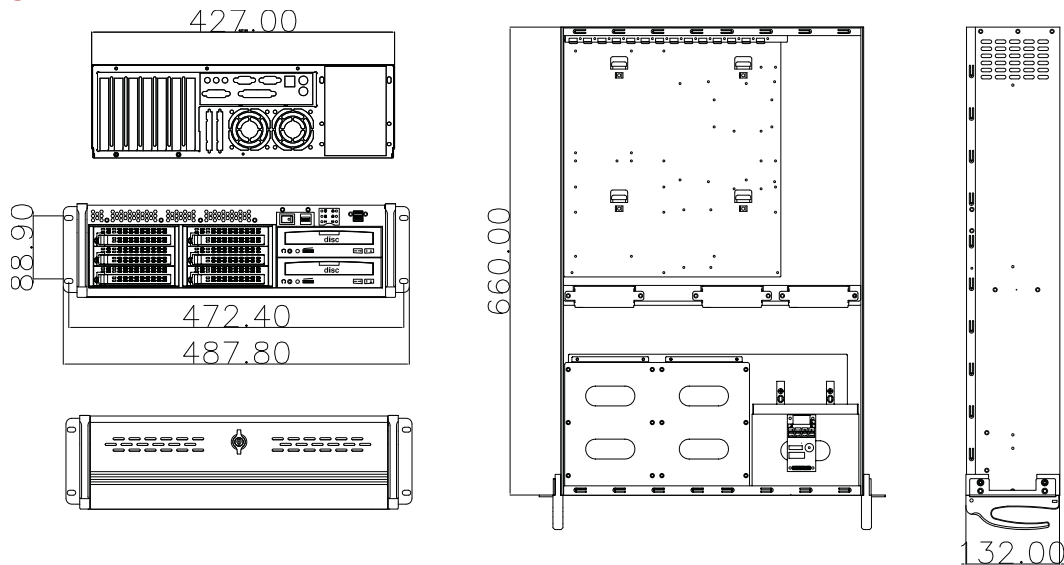

SPECIFICATIONS

Model Number	D2-300L-M6SA
RoHS Compliance Version	Yes
Standard Drive Bays	5.25" Drive: 2 Hot-Swap Drive: 6 x SATA
Cooling Fan	5 x 80mm
Mainboard Size [inch]	12 x 13
Indicators	LEDs for Power ON/OFF, HDD, Fan & Alarm
Switches	Power ON/OFF, System & Alarm Reset
Speaker	0.4W Built-In

Air Filter	Removable & Washable
Security	Front Bezel
Material of Front Bezel	Aluminum Alloy
Material of Handle	SECC Zinc-Coated Steel
Material of Main Chassis	1.2mm SECC Zinc-Coated Steel [Japan Made]
Color of Front Bezel	Black/Red/Blue/Silver/Gold
Color of Main Chassis	Black
Front Connector	Front USB 2.0 x 2 Connector
Dimensions (WxHxD)	19 x 5.25 x 27.1 inch

OPTIONAL ACCESSORIES

Model Number	Page
RP-COMBO-SLIM	N/A
BPU-230SATA	154
RP-HDD3.5	N/A
TC-iStorm7/8	160

Model Number	Page
DD-300-DR/DS/DBlue/DG	N/A
DD-Fan60/80	162-163
T-7	158
TC-Rail-24/26	160

POWER SUPPLY OPTIONS

Model Number	Output	Page
TC-3U/30	350W	224
TC-3U/40	400W	224
TC-3U/46	460W	224
TC-350/400/460R2U	350/400/460W	214

:: Specification and wiring diagram subject to change without notice
 :: Limited Warranty
 :: Last Update: Jan/2011

