

D3-200L

2U Config-Optimized Rackmount Chassis




INTRODUCTION

The redesigned D3-200L chassis is unique and compact. It features four 5.25" and two 3.5" open bays design to allow maximum configurability and performance. D3-200L is capable of mix and match optical and storage device with multiple I/O interface. It can be custom build to support application from mail, firewall, and web-server to Data, DVR, and archive server. The 3 PCI cut-outs support PCI, PCI 64bits, AGP, and PCI-Express add on cards. D3-200L is a well designed and flexible rackmount chassis.


FEATURES

- Ⓐ 32bit PCI Riser Card x 3 / Optional PCI x 2 + AGP 4 x x 1
- Ⓑ Optional Aluminum Chassis
- Ⓒ Front Access USB2.0 x 2
- Ⓓ 80mm x 3 Cooling Fan
- Ⓔ Power and HDD LED
- Ⓕ Power and Alarm Reset Switch

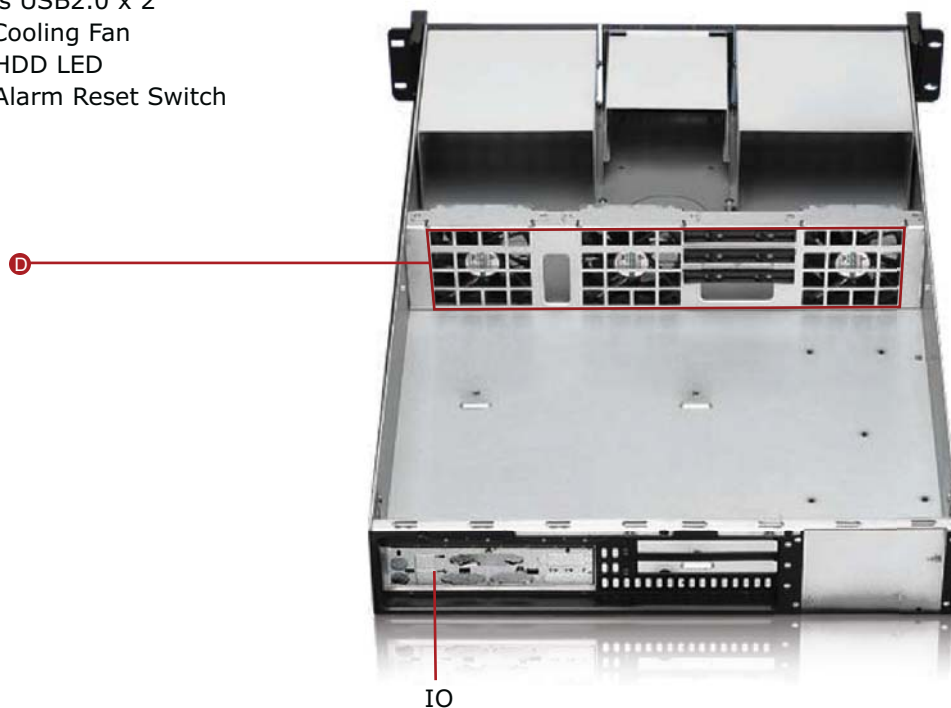

D3-200L

DRAWING

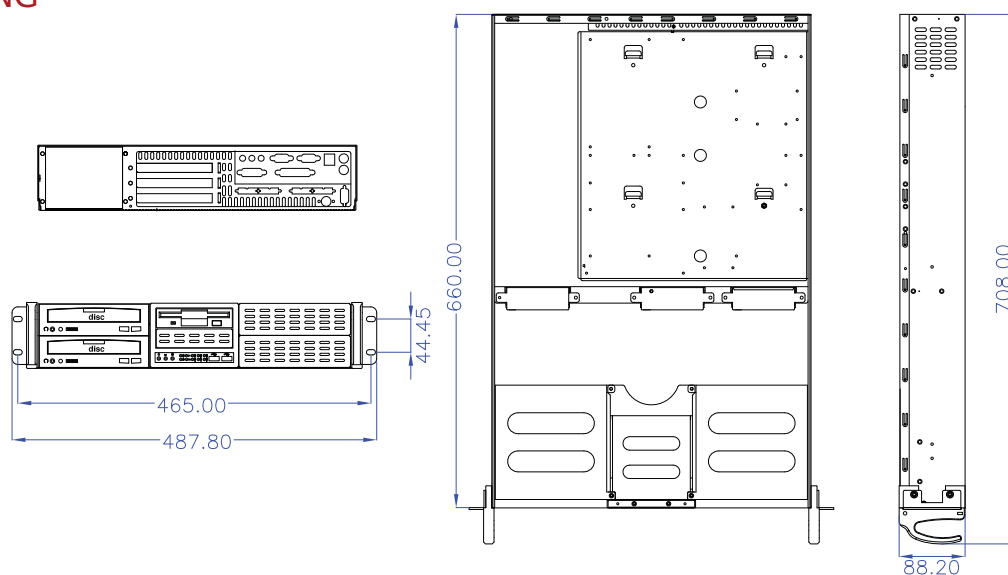

SPECIFICATIONS

Model Number	D3-200L	Expansion Slots	Standard: 3 x PCI 32bit Optional: 1 x AGP, 2 x PCI
RoHS Compliance Version	Yes	Material of Handle	SECC Zinc-Coated Steel
Standard Drive Bays	5.25" Drive: 4 3.5" Drive: 2	Material of Main Chassis	1.2mm SECC Zinc-Coated Steel [Japan Made]
Cooling Fan	3 x 80mm	Color of Main Chassis	Black
Mainboard Size [inch]	12 x 13	Front Connector	Front USB 2.0 x 2 Connector
Indicators	LEDs for Power ON/OFF, HDD, Fan & Alarm	Dimensions (WxHxD)	19 x 3.5 x 27.1 inch
Speaker	0.4W Built-In	Switches	Power ON/OFF, System & Alarm Reset

OPTIONAL ACCESSORIES

Model Number	Page	Model Number	Page
RP-COMBO-SLIM	N/A	RP-HDD3.5	N/A
BPU-230SATA	154	DD-Fan60	162
T-7	158	TC-iStorm7/8	160
TC-Rail-24/26	160		

POWER SUPPLY OPTIONS

Model Number	Output	Page
TC-2U/35	350W	220
TC-2U/40	400W	220
TC-2U/46	460W	220
TC-2U/55P	550W	222
TC-350R2U	350W	214
TC-400R2U	400W	214
TC-500S2U	500W	216

:: Specification and wiring diagram subject to change without notice
:: Limited Warranty
:: Last Update: Jan/2011

