

D3-300L

3U Config-Optimized Rackmount Chassis




INTRODUCTION

The redesigned D3-300L incorporates high flexibility and high availability in a 3U form factor. It features six 5.25" and three 3.5" bays for custom configuration of virtually any application. Whether it's web server, high performance super computing, or database server, D3-300L can accommodate the thermal requirement and drive storage needs. The 7 PCI slots support PCI, PCI 64bits, AGP, and PCI-Express add-on cards which enable expansion and upgrades for specialized functions and tasks. D3-300L is spacious and yet packed in with many possibilities.


FEATURES

- Ⓐ Front Access USB2.0 x 2
- Ⓑ 80mm x 3, 60mm x 2 Cooling Fan
- Ⓒ Power and HDD LED
- Ⓓ Power and Alarm Reset Switch
- Ⓔ 7 Slots Backplane
- Ⓕ Optional Aluminum Chassis

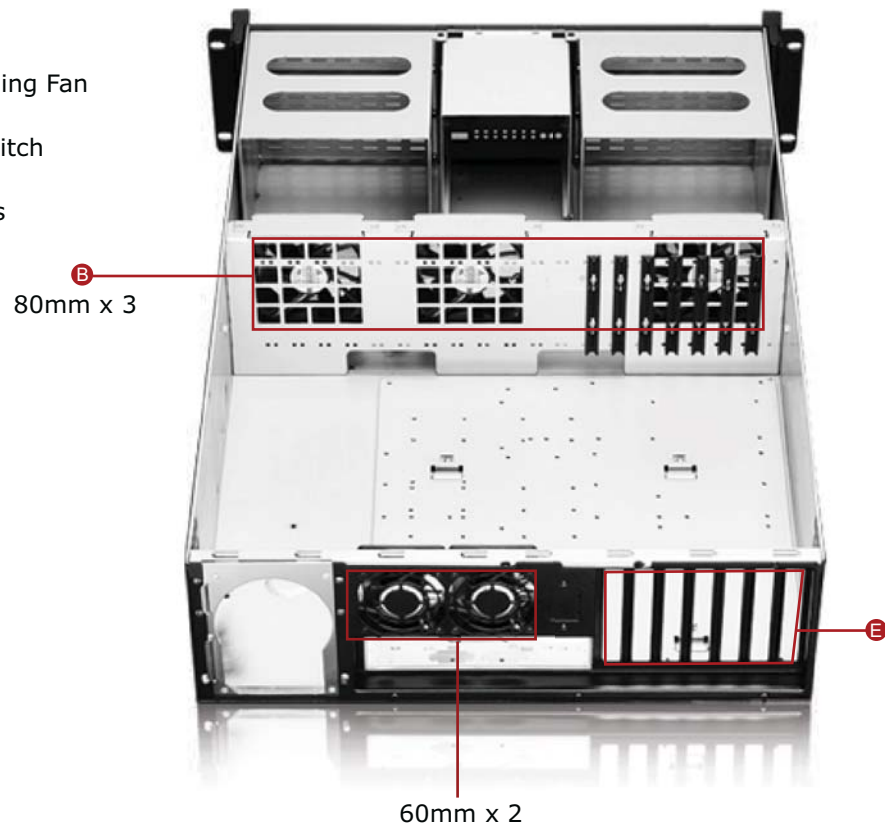

D3-300L

DRAWING

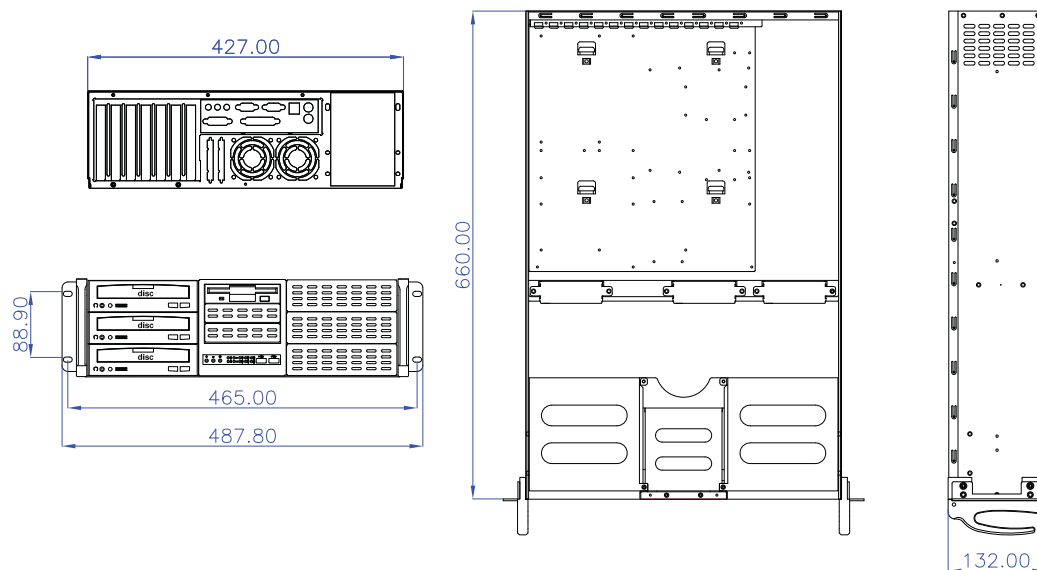

SPECIFICATIONS

Model Number	D3-300L	Material of Handle	SECC Zinc-Coated Steel
RoHS Compliance Version	Yes	Material of Main Chassis	1.2mm SECC Zinc-Coated Steel [Japan Made]
Standard Drive Bays	5.25" Drive: 6 3.5" Drive: 3	Color of Main Chassis	Black
Cooling Fan	3 x 80mm, 2 x 60mm	Front Connector	Front USB 2.0 x 2 Connector
Mainboard Size [inch]	12 x 13	Dimensions (WxHxD)	19 x 5.25 x 27.1 inch
Indicators	LEDs for Power ON/OFF, HDD, Fan & Alarm	Switches	Power ON/OFF, System & Alarm Reset
Speaker	0.4W Built-In		

OPTIONAL ACCESSORIES

Model Number	Page	Model Number	Page
RP-COMBO-SLIM	N/A	BPU-340SATA	155
BPU-230SATA	154	DD-Fan60/80	162-163
RP-HDD3.5	N/A	T-7	158
TC-iStorm7/8	160	TC-Rail-24/26	160

POWER SUPPLY OPTIONS

Model Number	Output	Page
TC-3U/30	350W	224
TC-3U/40	400W	224
TC-3U/46	460W	224
TC-350/400/460R2U	350/400/460W	214
TC-2U/55P	550W	222

:: Specification and wiring diagram subject to change without notice
 :: Limited Warranty
 :: Last Update: Jan/2011

