

D3-400L

4U Config-Optimized Rackmount Chassis




INTRODUCTION

The redesigned D3-400L incorporates high flexibility and high availability in a 4U form factor. It features ten 5.25 bays for custom configuration system. From high density Raid storage, Data center server to high performance super computing, D3-400L can handle them all. The 7 PCI slots support PCI, PCI 64bits, AGP, and PCI-Express add-on cards for additional expansion and upgrades. Exceptionally designed 120mm hot-swappable fan thermal solution provides superior system cooling. D3-400L is a high scalable and multi-functional rackmount chassis.


FEATURES

- Ⓐ Front Access USB2.0 x 2
- Ⓑ 120mm x 3, 80mm x 2 Cooling Fan
- Ⓒ Power and HDD LED
- Ⓓ Power and Alarm Reset Switch
- Ⓔ 7 Slots Backplane
- Ⓕ Optional Aluminum Chassis

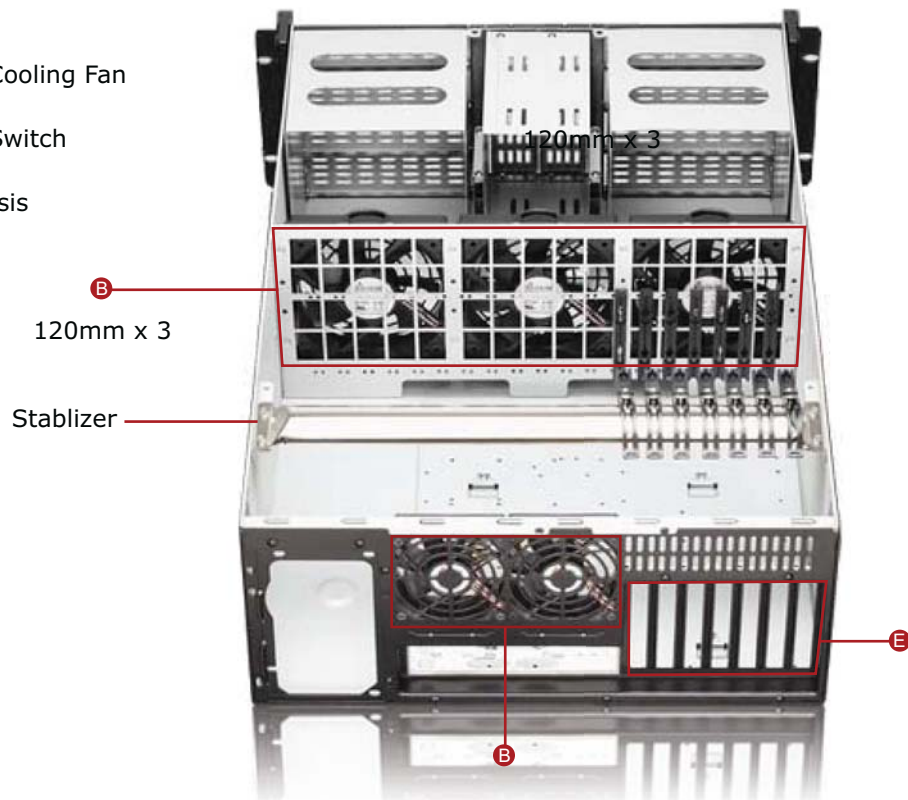

D3-400L

DRAWING

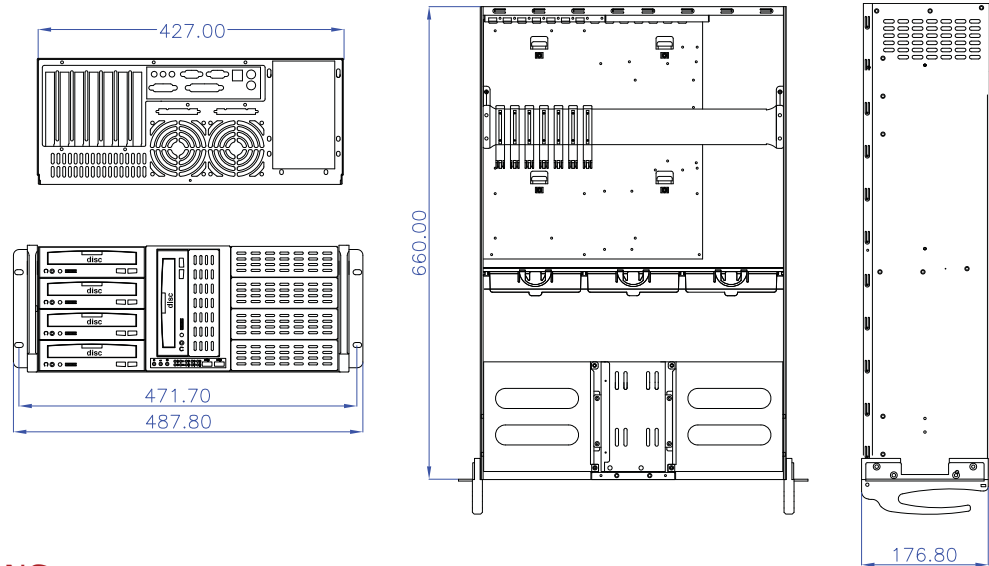

SPECIFICATIONS

Model Number	D3-400L	Switches	Power ON/OFF, System & Alarm Reset
RoHS Compliance Version	Yes	Material of Handle	SECC Zinc-Coated Steel
Standard Drive Bays	5.25" Drive: 10	Material of Main Chassis	1.2mm SECC Zinc-Coated Steel [Japan Made]
Cooling Fan	3 x 120mm, 2 x 80mm	Color of Main Chassis	Black
Mainboard Size [inch]	12 x 13	Front Connector	Front USB 2.0 x 2 Connector
Indicators	LEDs for Power ON/OFF, HDD, Fan & Alarm	Dimensions (WxHxD)	19 x 7 x 27.1 inch
Speaker	0.4W Built-In		

OPTIONAL ACCESSORIES

Model Number	Page	Model Number	Page
RP-COMBO-SLIM	N/A	BPU-230SATA	154
BPU-340SATA	155	DD-Fan80	63
RP-HDD3.5	N/A	T-7	158
TC-iStorm7/8	160	TC-Rail-24/26	160

POWER SUPPLY OPTIONS

Model Number	Output	Page	Model Number	Output	Page
TC-300/400R8	300/400W	208	TC-600/650/700/750PD2	600/650/700/750W	234
TC-300/400/500R8A	300/400/500W	210			
TC-350/400/500PD1	350/400/500W	230			
TC-600/700R3N	600/700W	212			
TC-580/620PD3	580/620W	232			

:: Specification and wiring diagram subject to change without notice
 :: Limited Warranty
 :: Last Update: Jan/2011

