

S-9

Home Entertainment/ Server ATX Tower



INTRODUCTION

iStarUSA introduces a new modern, tool-less assembly design Mid-Tower ATX chassis. It provides innovative features such as aluminum top mount USB2.0, Audio, Firewire 1394 for easy access, metal mesh bezel with air filter for great cooling, excellent thermal solution meets CAG 1.1 standard. It supports iStarUSA redundant power supply that keep system running without any interruptions. It is modest and essential for home entertainment center, office PC, and personal workstation.

FEATURES

- Ⓐ Tool-less Thumb Screws
- Ⓑ Top Access I/O Panel
- Ⓒ Aluminum Dash Plate
- Ⓓ Metal Mesh Bezel Wsith Air Filter
- Ⓔ Meet CAG1.1 Intel Thermal Standard
- Ⓕ Optional iStarUSA Mini Redundant Power Supply
- Ⓖ Easy Assembling Drives
- Ⓗ Easy Assembling Expansion Slots



Accessories




Ⓔ Easy Assembling Drives



Ⓒ

DRAWING

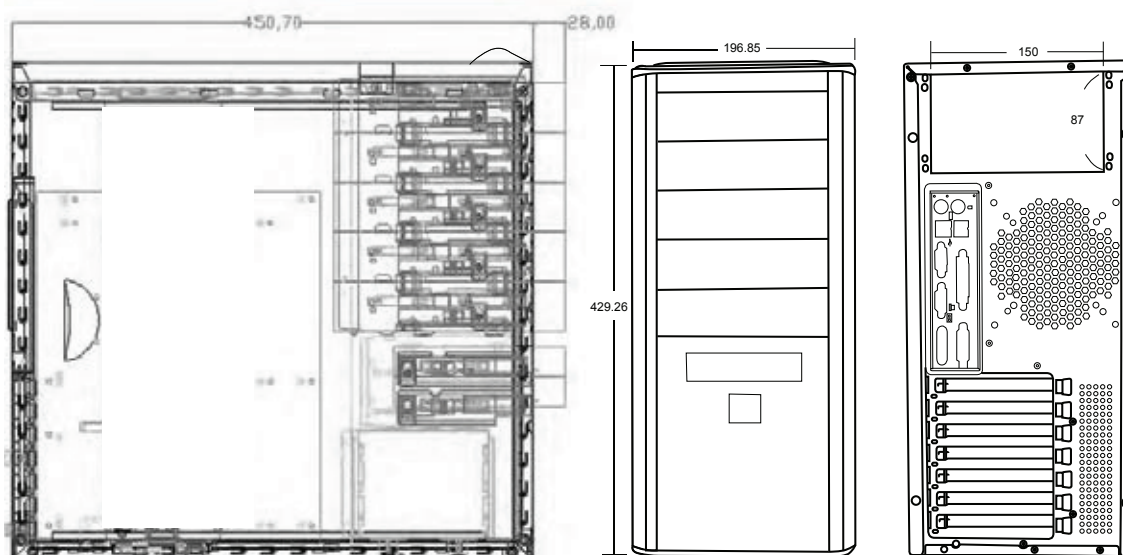

SPECIFICATIONS

Model Number	S-9	Switches	Power ON/OFF, System & Alarm Reset
RoHS Compliance Version	Yes	Material of Front Bezel	Aluminum Parts
Standard Drive Bays	5.25" Drive: 5 3.5" Drive: 1 3.5" Drive [internal]: 4	Material of Main Chassis	0.8/0.6 SECC/SGCC
Cooling Fan [Option]	[2x120mm]	Color of Front Bezel	Black
Mainboard Size [inch]	12 x 10	Color of Main Chassis	Black
Indicators	LEDs for Power ON/OFF, HDD, Fan & Alarm	Front Connector	USB 2.0 x 2 Connector 1 x IEEE1394, 1 x Line Out, 1 x Microphone
Speaker	0.4W Built-In	Dimensions (WxHxD)	8.2 x 17.8 x 20.2 inch

OPTIONAL ACCESSORIES

Model Number	Page	Model Number	Page
BPU-230SATA		BPU-340SATA	
DD-Fan80		RP-HDD3.5	
T-7		TC-iStorm8	

POWER SUPPLY OPTIONS

Model Number	Output	Page	Model Number	Output	Page
IS-400/500R8P	400/500W		TC-350/400/500PD1	350/400/500W	
IS-550R8P	500W		TC-600/650/700/750PD2	600/650/700/750W	

:: Specification and wiring diagram subject to change without notice

