


DIMENSION		
NO.	TYPE	WIRE
1	20P+4P	16#
HDD 4P *2		
1	500±20mm	18#
2/3	150±10mm	18#
FLOPPY 4P		
4	150±10mm	22#
SATA SP		
1	500±20mm	18#
2	150±10mm	18#
CPU 4P(12V2)		
1	500±20mm	18#

NOTE:

HDD 4P			
PIN	COLOR	VOLTAGE	GND
1	YELLOW	+12V1	
2	BLACK	GND	
3	BLACK	GND	
4	RED	+5V	
FLOPPY 4P			
1	YELLOW	+12V1	
2	BLACK	GND	
3	BLACK	GND	
4	RED	+5V	
SATA SP			
1	YELLOW	+12V1	
2	BLACK	GND	
3	RED	+5V	
4	BLACK	GND	
5	ORANGE	+3.3V	
CPU 4P			
1	BLACK	GND	
2	BLACK	GND	
3	YEL/BLK	+12V2	
4	YEL/BLK	+12V2	

24P			
PIN	COLOR	VOLTAGE	GND
1	ORANGE	+3.3V	
2	ORANGE	+3.3V	
3	BLACK	GND	
4	RED	+5V	
5	BLACK	GND	
6	RED	+5V	
7	BLACK	GND	
8	GRAY	P.G.	
9	PURPLE	+5VSB	
10	YELLOW	+12V1	
11	YELLOW	+12V1	
12	ORANGE	+3.3V	
13	ORANGE	+3.3V	
13-1	ORANGE	+3.3V SENSE 22#	
14	BL.UE	-12V	
15	BLACK	GND	
16	GREEN	PS-ON	
17	BLACK	GND	
18	BLACK	GND	
19	BLACK	GND	
20	RESERVE	N.C.	
21	RED	+5V	
22	RED	-5V	
23	RED	-5V	
24	BLACK	GND	

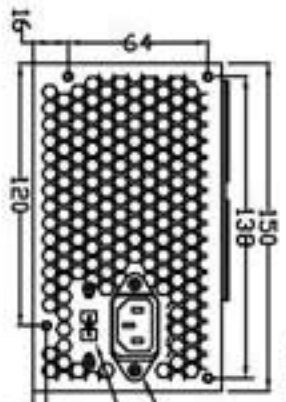

Model		TC-500PD1		iStarUSA™			
Title							
Drawn	YCX	Date	2005/03/01				
Checked		Approved		Projection		Rev.	A2
spec.				Material		Unit	MM
P/N				Quantity		Scale	
				Remarks			